


Clarification Request

References: ASHRAE 135.1-2025, ASHRAE 135-2024, Test Package 26.1.

Date of BTL-WG Response: August 20, 2026

Background:

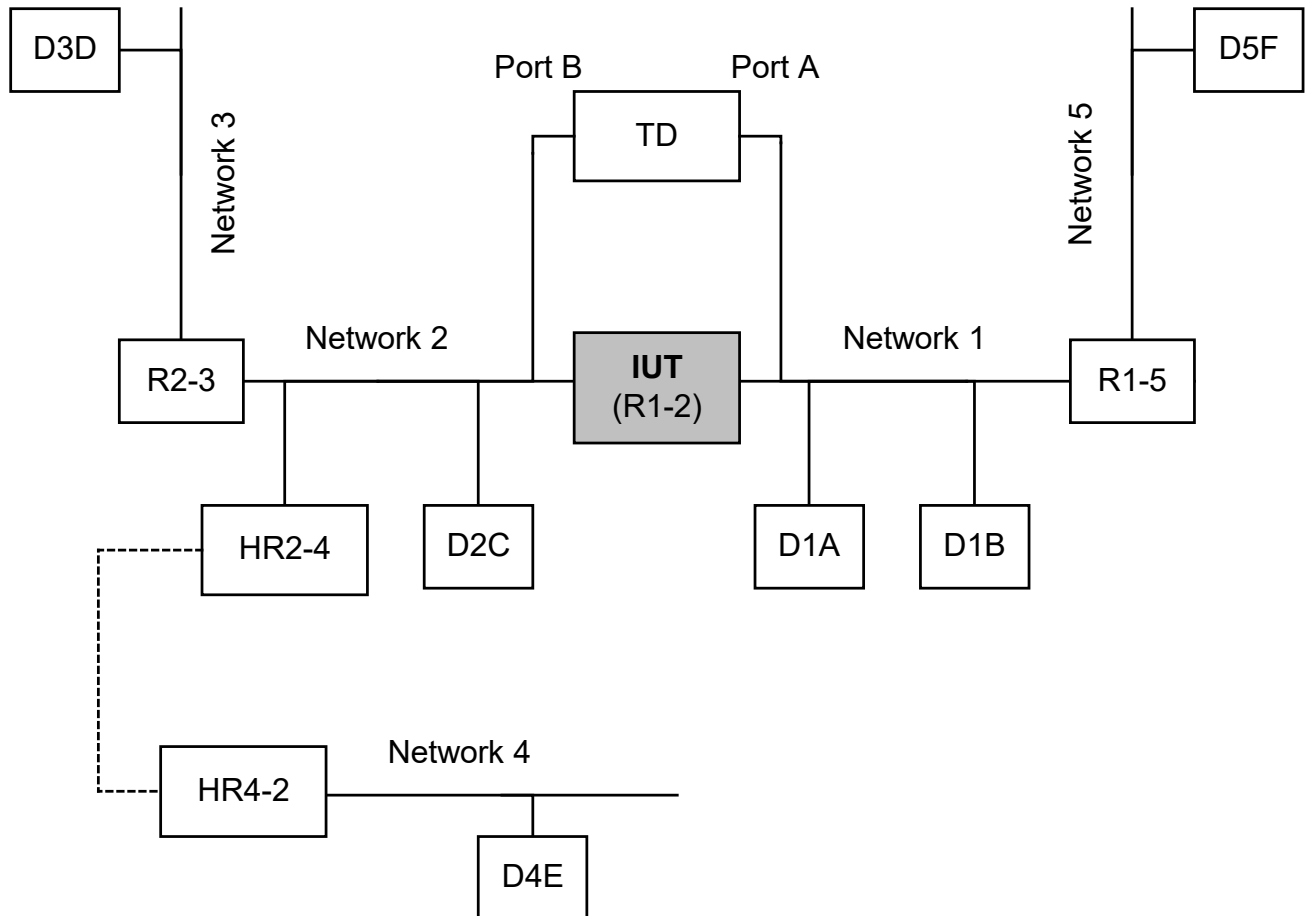

10.2.4.3 Global Broadcast from a Remote Device

Purpose: To verify that the IUT properly forwards global broadcast messages that originate on a remote network.

Test Steps:

1. TRANSMIT PORT A,
DA = LOCAL BROADCAST,
SA = R1-5,
DNET = GLOBAL BROADCAST,
DLEN = 0,
SNET = 5,
SADR = D5F,
Hop Count = 254,
BACnet-Unconfirmed-Request-PDU,

'Service Choice' = Who-Is

'I-Am Device Identifier' = D5F,

2. RECEIVE PORT B,

DA = LOCAL BROADCAST,

SA = IUT,

DNET = GLOBAL BROADCAST,

DLEN = 0,

SNET = 5,

SADR = D5F,

Hop Count = (any value x: $0 < x < 254$),

BACnet-Unconfirmed-Request-PDU,

'Service Choice' = Who-Is

Notes to Tester: The message described in step 2 shall be transmitted from all ports of the router except for Port 1.

Problem:

The line item marked in yellow does not really make sense here. Maybe a leftover from a copy/paste?

Question:

Should this line be removed from this test?

Response:

Yes. This is an error in 135.1-2025.